

Maintenance Requirements

DAILY

- Nozzle Check
- Print Head Clean as needed based on Nozzle Check
- Wipe the wiper blade clean at the beginning of the day
- Remove and gently shake white ink carts every 2-3 days

WEEKLY

- Clean Maintenance Station Rubber Gaskets with cleaning Solution
- Remove and clean Wiper Blade
- Clean Print Head Mounting Plate
- Run Cleaning Solution through Maintenance Station
- Inspect Left Tray Drip Pan Foam (under the maintenance station) Clean or Replace as needed

BI-WEEKLY

- Inspect right Drip Pan Foam, Clean, or Replace if needed

MONTHLY

- Inspect Waste Ink Tank and Drain as required
- Every 3 months, flush entire ink Delivery System
- Check Fan Filters and Replace if Needed

RICOH Ri 3000/Ri 6000

Maintenance Schedule Version 1.0

Optimal Printer Environment

- Humidity at 45% - 80%
- Temperature 59°F/15°C - 90°F/32°C
- Printer should stay powered on at all times

Recommended Cleaning Supplies


- 30 pack of Lint Free Wipes
 - 50 Pack of Cleaning Applicators
 - 1 Bottle of cleaning Solution 4oz
- (All items should be on-hand at all times)*

Technical Support


Phone: 877-646-0999

Email: tech1@anajet.com

If outside the USA please contact your local distributor

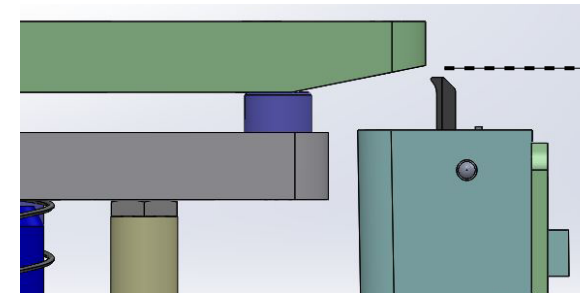

When removing the Wiper Blade please note the curved edge (lip) should be facing the Printhead Carriage when placed back into position

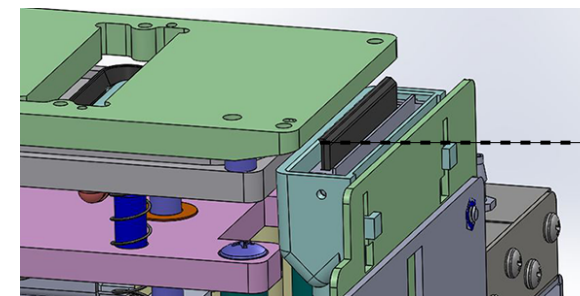

Before using the printer each day, confirm the motion of the Wiper Blade and Maintenance Station. Lubricate if not moving.

RICOH
imagine. change.